





WK - 0308

Tornado – 4D Double hole

Tornado – 4D Double One-Piece toilet Size :700 * 380 * 730 S-trap(axis): 250mm Size :700 * 380 * 730 mm





WK - 0309

Wash down
One-Piece toilet
Size:690 * 360 * 710
S-trap(axis): 220mm Size :690 * 360 * 710 mm





WK - 0328

Wash Down sys
One-Piece toilet
Size :680 * 360 * 755
S-trap(axis): 250mm Size :680 * 360 * 755 mm







Tornado – 4 shooting hole

Size :720 * 425 * 770 mm









<u>WK - 0642</u>

Washdown
One-Piece toilet
Size :735 * 505 * 750
S-trap(axis): 250mm Size :735 * 505 * 750 mm







WK - 0659

Wash down
One-Piece toilet
Size:665* 455 * 560 r
S-trap(axis): 300mm

Size :665* 455 * 560 mm







Tornado – 4 Double la One-Piece closet
Size :710 * 385 * 745
S-trap(axis) 220 mm Tornado – 4 Double hole

Size :710 * 385 * 745 mm







DIMENSION Siphonic One-Piece toilet

Size :670 * 360 * 730 mm

S-trap(axis): 220mm









Hilton

Wash down
One-Piece toilet
Size :680 * 420 * 730
S-trap(axis): 250mm Size :680 * 420 * 730 mm







Austin

siphonic
one piece toilet
Size :715 * 370 *755mm
S-trap(axis): 220-300mm







Cody

siphonic one piece toilet size :640*360*765mm

strap:220 mm







scar

Double hole
One-Piece toilet
Size :670 * 410 * 715
S-trap(axis): 220mm Size :670 * 410 * 715 mm









Calanda

Wash down
One-Piece toilet
Size :680 * 390 * 680 mm
S-trap(axis): 250mm





Back to wall SMART toilet



WK-H8


Size :680* 420*530mm






Specification

Name			Smart Toilet	Smart Toilet			
	Volta	ige	AC220V 50/60Hz	Rated power		1430w (Inlet Temp 15°C±2°C, 0.2MPa)	
	Heating Tank		0.3 L	Drying	Speed	≥4m/s	
	inlet Water Temp.		1°C~30°C		Temp.	4 Levels (home temp~55℃)	
	Inlet Water Pressure		0.15~0.75 Mpa		Drying Power	250w	
	Wate	er Temp.	Adjustable Range: 30°C~40°C	1 [Safety Device	Double metal sheet switch& Temp fuse	
Washing Device	Water Output	Rear	0.35~1.2 L/min (0.2MPa)	Seat Temp	Surface Temp.	4 Levels (home temp~40 C)	
		Bidet			Heating Power	45w	
	Position	Rear	50~90 mm		Safety Device	Temp controller & Temp fuse	
		Bidet			Structure	Soft close	
	Power Rate		1600w]	Safety Device	Leakage protection & Seating sensor	
	Safety Device		Flow sensor, Temp sensor, Temp Switch, Temp Fuse	Length of wire		1.5m	

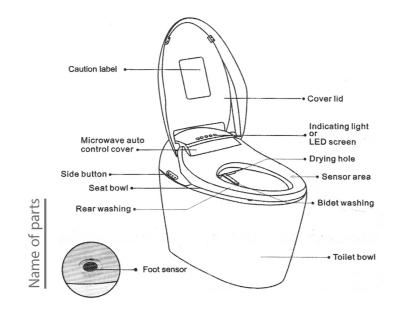





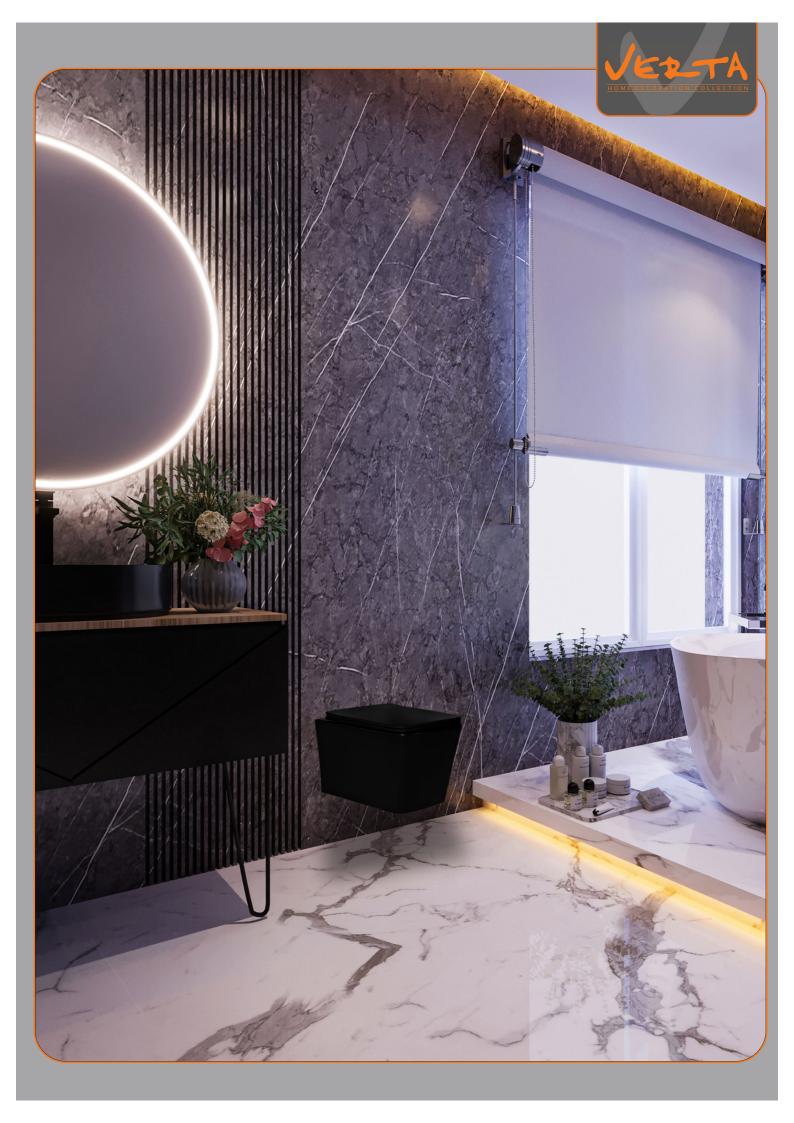







Wash down Wall – hang toilet

Size: 545 * 385 * 340 mm

P – trap : 180 mm







Wash down Wall – hang toilet

Size : 520 * 360 * 290 mm

P – trap : 180 mm







Victoria

Wash down Wall – hang toilet

Size: 505 * 365 * 360 mm

P – trap : 180 mm







DIMENSION Wash down Wall – hang toilet

Size: 530 * 360 * 360 mm

P – trap : 180 mm Roughing – in











Size : 490 * 360 * 350 mm DIMENSION

P – trap : 180 mm







hang toilet

Size : 510 * 380 * 355 mm

P - trap : 180 mm







H2005

hang toilet

Size : 520 * 370 * 340 mm

P – trap : 180 mm







DIMENSION

hang toilet

Size:570*350*330

P - trap: 180 mm











Size : 580 * 410 * 410 mm

P – trap : 180 mm









DIMENSION Size: 565 * 390 * 440 mm





Specification

Technica	l Parameters	220V~50Hz Maximum Power: 1200W Rated Power: 1650W (Test Conditions: inlet water temp. 15±1°C, ambient temperature 20±5°C)		
Water	Source	Running water		
Inlet	Pressure	Min 0.05Mpa ~ Max 0.75Mpa		
	Rear washing water volume	0.66L/min (max)		
	Bidet washing water volume	0.68L/min (max)		
	Temp. adjustable	Normal~High (≈39°C)		
	Heating power	Maximum 1200W		
	Safety device	Temp. switch, water temp. sensor, temp. fuse		
	Temp. adjustable	Normal~High (≈38°C)		
Seat cover heating	Heating power	Maximum 35W		
device	Safety device	Temp. switch, seat temp. sensor, temp. fuse		
	Temp. adjustable	Normal~High (≈55°C)		
Drying device	Heating power	Maximum 200W		
	Safety device	Temp. switch, temp. fuse		
Safety device	Electrical leakage protecting device			
Length of power line	1.5m			

Remote Control Drying

